


CORDLESS BATTERY CABLE CUTTERS

AAEC-20 SERIES

AAEC-20

Tool dimension: 325(L)x285(W)x70(H)mm

Weight: 3.7kgs excludes battery

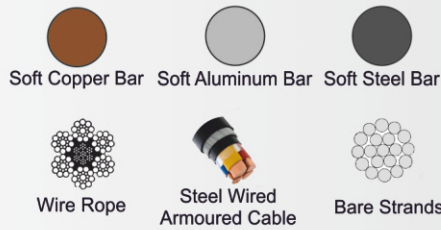


Model	Output	Head Rotation	Hemp-core wire rope 6x12/6x19	Soft Copper & Aluminum Round Bar	Bare copper & Aluminum wire strand	Soft steel round bar (below SS41)	Armored Underground cable	Wire rope (hemp-core) 6x7	Dimension	Weight	Remark
AAEC-20	6 tons	360°	Max. O.D. 20mm	Max. O.D. 20mm	Max. O.D. 20mm	Max. O.D. 16mm	Max. O.D. 20mm	Max. O.D. 16mm	325(L)x285 (W)x70(H)mm	3.7kgs excludes battery	auto-release version

AAEC-25 SERIES

AAEC-25

Tool dimension: 360(L)x300(W)x75(H)mm

Weight: 4.9kgs excludes battery

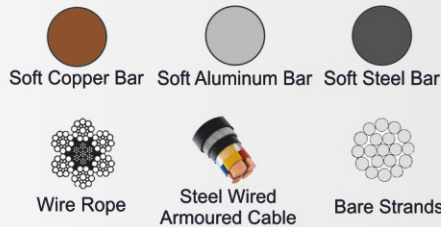


Model	Output	Head Rotation	Hemp-core wire rope 6x12/6x19	Soft Copper & Aluminum Round Bar	Bare copper & Aluminum wire strand	Soft steel round bar (below SS41)	Armored Underground cable	Wire rope (hemp-core) 6x7	Dimension	Weight	Remark
AAEC-25	6 tons	360°	Max. O.D. 25mm	Max. O.D. 25mm	Max. O.D. 25mm	Max. O.D. 20mm	Max. O.D. 25mm	Max. O.D. 18mm	360(L)x300 (W)x75(H)mm	4.9kgs excludes battery	auto-release version

AAEC-40 SERIES

AAEC-40

Tool dimension: 435(L)x315(W)x75(H)mm

Weight: 5.7kgs excludes battery

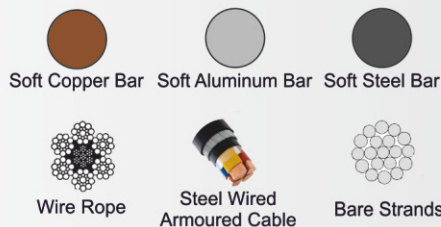


Model	Output	Head Rotation	Hemp-core wire rope 6x12/6x19	Soft Copper & Aluminum Round Bar	Bare copper & Aluminum wire strand	Soft steel round bar (below SS41)	Armored Underground cable	Wire rope (hemp-core) 6x7	Dimension	Weight	Remark
AAEC-40	6 tons	360°	Max. O.D. 25mm	Max. O.D. 20mm	Max. O.D. 32mm	Max. O.D. 16mm	Max. O.D. 40mm	Max. O.D. 20mm	435(L)x315 (W)x75(H)mm	5.7kgs excludes battery	auto-release version

AAEC-S32 SERIES

AAEC-S32

Tool dimension: 410(L)x315(W)x75(H)mm

Weight: 4.9kgs excludes battery

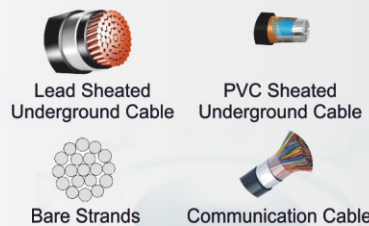

Model	Output	Head Rotation	Bare copper & Aluminum wire strand	CCP	Lead-sheathed cable	PVC Underground cable	Dimension	Weight	Remark
AAEC-S32	6 tons	360°	Max. O.D. 28mm	Max. O.D. 30mm	Max. O.D. 30mm	Max. O.D. 30mm	410(L)x315 (W)x75(H)mm	4.9 kgs excludes battery	auto-release version