

CORDLESS HYDRAULIC CABLE CUTTERS

CUTTERS

AMECB-20 SERIES

AMECB-20 (18V Li-Ion)

Tool dimension: 365(L)x122(W)x76(H)mm

Weight: 2.7kgs excludes battery




Model	Output	Head Rotation	Wire rope (hemp-core) 6x12/6x19	Soft copper & Aluminum round bar	Bare copper & Aluminum wire strand	Armored Underground cable	Soft steel round bar (Below SS41)	Dimension	Weight	Remark
AMECB-20	6 tons	180°	Max. O.D. 20mm	Max. O.D. 20mm	Max. O.D. 20mm	Max. O.D. 20mm	Max. O.D. 16mm	365(L)x122 (W)x76(H)mm	2.7kgs excludes battery	Inline type, 18V

AMECB-S32 SERIES

AMECB-S32 (18V Li-Ion)

Tool dimension: 440(L)x122(W)x76(H)mm

Weight: 3.6kgs excludes battery

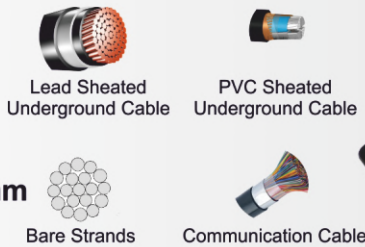

Model	Output	Head Rotation	CCP & Lead-sheathed cable	PVC-sheathed underground cable	Bare copper & Aluminum wire strand	Dimension	Weight	Remark
AMECB-S32	6 tons	180°	Max. O.D. 30mm	Max. O.D. 30mm	Max. O.D. 28mm	440(L)x122 (W)x76(H)mm	3.6kgs excludes battery	Inline type, 18V

AMECL-32Y SERIES

AMECL-32Y (14.4V Li-Ion)

Tool dimension: 503(L)x120(W)x70(H)mm

Weight: 2.9kgs excludes battery



Model	Output	Head Rotation	Copper & Aluminum Cable	Dimension	Weight	Remark
AMECL-32Y	6 tons	360°	Max. O.D. 32mm 300mm ² (600MCM)	503(L)x120(W)x70(H)mm	2.9 kgs excludes battery	Inline type, 14.4V

AECB-85Y SERIES

AECB-85Y (18V Li-Ion)

Tool dimension: 575(L)x380(W)x240(H)mm

Weight: 12kgs excludes battery



Model	Output	Head Rotation	Copper & Aluminum cable	Lead-sheathed cable	Armored Underground cable	Dimension	Weight	Remark
AECB-85Y	12 tons	360°	Max. O.D. 85mm	Max. O.D. 85mm	Max. O.D. 85mm	575(L)x380 (W)x240(H)mm	12 kgs excludes battery	Pistol type, 18V, scissors type