

CORDLESS HYDRAULIC CRIMPING TOOLS




AMEPL-185 SERIES



Capacity: 6 Tons, Stroke: 17mm, Swivel Head: 180°, (14.4V Li-Ion)

Model	Output	Head Rotation	Application	Standard Dies	Stroke	Crimping Range Supported	Dimension	Weight	Remark
AMEPL-185	6 tons	180°	Cable lug hexagon crimping	Standard die set (total 6pcs) 10-16/ 25-35/ 50-70/ 95-120/ 150/ 185-6mm2 (i.e. B1801-B1806/ R18 type)	17mm	6-185mm ² AWG 10-350MCM crimping range	470(L)x100 (W)x70(H)mm	2.4 kgs excludes battery	Flip-latch type, 14.4V, inline type

AMEPB-240 SERIES

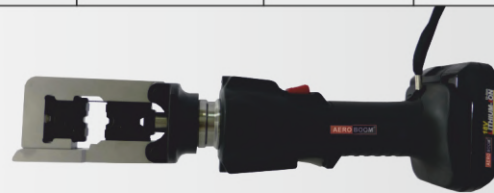

Capacity: 6 Tons, Stroke: 17mm, Swivel Head: 180°, (18V Li-Ion)

Model	Output	Head Rotation	Application	Standard Dies	Stroke	Crimping Range Supported	Dimension	Weight	Remark
AMEPB-240	6 tons	180°	Cable lug hexagon crimping	Standard die set (total 7pcs) 10-16/ 25-35/ 50-70/ 95-120/ 150/ 185/ 240mm2 (i.e. B8001-B8007/ R19 type)	17mm	10-300mm ² (AWG8-600MCM) crimping range	405(L)x122 (W)x76(H)mm	2.6 kgs excludes battery	Flip-latch type, normal version, inline type

AMEPB-22 SERIES



Capacity: 6 Tons, Stroke: 17mm, Swivel Head: 180°, (18V Li-Ion)

Model	Output	Head Rotation	Application	Standard Dies	Stroke	Crimping Range Supported	Dimension	Weight	Remark
AMEPB-22	6 tons	180°	Cable lug hexagon crimping C-lugs crimping, stainless pipe pressing, threaded rod cutting	Standard die set (total 7pcs) 70/ 95/ 120/ 150/ 185/ 240/ 300mm2 (i.e. B2270-B22300/ R22 type)	17mm	6-300mm ² AWG10-600MCM crimping range	380(L)x122 (W)x76(H)mm	3.1 kgs excludes battery	Flip-latch type, normal version, inline type

AMEPL-8 SERIES

Die Less



Capacity: 6 Tons, Nib Opening 38 mm: 17mm, Swivel Head: 360°, (14.4V Li-Ion)

Model	Output	Head Rotation	Application	Crimping Range Supported	Nib Opening	Dimension	Weight	Remark
AMEPL-8	6 tons	360°	Cable lug die-less crimping (4-points crimping)	DIN 10-400mm ² AWG8-750MCM crimping range	38mm	530(L)x100 (W)x70(H)mm	2.3 kgs excludes battery	Guiding-rail design, 14.4V