




## HOSES


Model	max operating pressure Bar	Hose end		Type	hose length (M)
		end one	end two		
AH64Series twin hydraulic hose 	720	1/4"NPT	1/4"NPT	AH6445-1	4.5
				AH6460-1	6
				AH6490-1	9
				AH64100-1	10
BH-84 Series superhigh pressure hydraulic hose 	1800	1/4"BSP	1/4"BSP	BH842	2
				BH846	6
				BH849	9
				BH8412	12
BH-94 Series superhigh pressure hydraulic hose 	2800	1/4"BSP	1/4"BSP	BH943	3
				BH946	6
				BH949	9

Above are the standard length, can be customized according to customer requirements of various length

- Four layers nylon design. Two layers of high strength steel wire braids and plastic coating.
- Twin hoses supplied for Hydraulic Torque Wrench.
- Light weight, small size and high bending radius.
- Exhibits low volumetric expansion under pressure.

### Hydraulic Hose for Torque Wrench

Model	Length (ft.)
AH-15	15
AH-20	20
AH-40	40

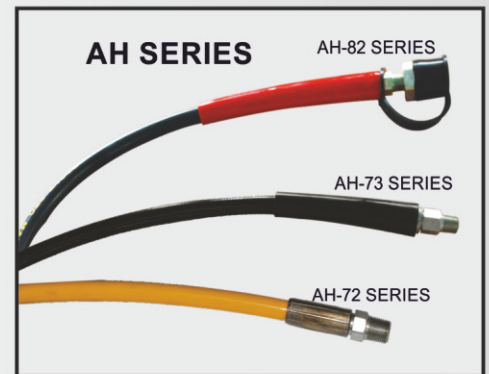

### AH Ordering Matrix and Specifications

Model	HOSE MATERIAL	Internal Diameter	Working Pressure	Burst Pressure	Hose End 1	Hose End 2	Length
		IN	PSI	PSI	IN/PTI	IN/PTI	FT
AH-7206	THERMO-PLASTIC	1/4	10,000	40,000	3/8-NPT	3/8-NPT	6
AH-7210							10
AH-7220							20
AH-7230							30
AH-7250							50
AH-72100							100
AH-7306	THERMO-PLASTIC	3/8	10,000	20,000	3/8-NPT	3/8-NPT	6
AH-7310							10
AH-7320							20
AH-7330							30
AH-7350							50
AH-73100							100
AH-8206N	RUBBER	1/4	10,000	20,000	3/8-NPT	3/8-NPT	6
AH-8210N							10
AH-8220N							20
AH-8230N							30
AH-8250N							50
AH-82100N							100
AH-8206C	RUBBER	1/4	10,000	20,000	3/8-NPT	CH-604 MALE COUPLER W/ DUST COVER	6
AH-8210C							10
AH-8220C							20
AH-8230C							30
AH-8250C							50
AH-82100C					100		
AH-8206TC					1/4-NPT		6