

MANUAL HYDRAULIC CRIMPING TOOLS



ATHX-1851 SERIES

**ATHX-1851, 6 tons output, Weight: 2kgs,
Length: 370mm, Crimping range: 6-185mm²**



Model	Output	Application	Standard Dies	Crimping Range Supported	Length	Weight	Remark
ATHX-1851	6 tons	For non-insulated terminal crimping	Standard dies set (6pcs) 10-16/25-35/50-70/ 95-120/150/185-6mm ² (i.e. B1801-B1806, R18 type)	6-185mm² (AWG10-350MCM) hexagon crimping range	370mm	2kgs	Flip-open jaw

ATP-58A SERIES


**ATP-58A, 8 tons output, Weight: 5.2kgs,
Length: 528mm, Crimping range: 10-240mm²**



Model	Output	Application	Standard Dies	Crimping Range Supported	Length	Weight	Jaw Open
ATP-58A	8 tons	Cable lug hexagon crimping	Standard dies set (11pcs) 10/16/25/35/50/70/95/120/150/185/240mm ² (i.e. B5810-B58240, 58 type)	10-240mm² (AWG8-400MCM) hexagon	528mm	5.2kgs	20mm

ATP-80FR SERIES

**ATP-80FR, 8 tons output, Weight: 4kgs,
Length: 550mm, Crimping range: 10-300mm²**

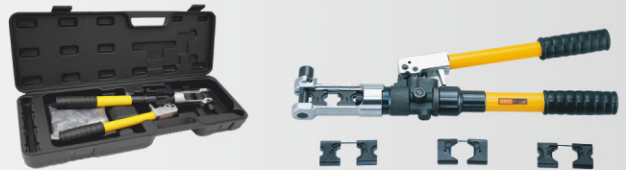

Model	Output	Application	Standard Dies	Crimping Range Supported	Length	Weight	Remark
ATP-80FR	8 tons	Cable lug hexagon crimping	Standard dies set (8pcs) 10-16/25-35/50-70/95-120/150/185/240/300mm ² (i.e. B8001-B8008, R19 type)	10-300mm² (AWG8-600MCM) hexagon crimping range	550mm	4kgs	With fiberglass handles

ATP-240 SERIES

**ATP-240, 12 tons output, Weight: 6.3kgs,
Length: 582mm, Crimping range: 6-400mm²**



Model	Output	Application	Standard Dies	Crimping Range Supported	Length	Weight	C-jaw opening	Remark
ATP-240	12 tons	For connector or cable lug hexagon crimping	Standard dies (10pcs) 35/50/70/95/120/150/185/240/ 300/400mm ² (i.e. B3035-B30400, R30 type)	6-400mm² (AWG10-750MCM)	582mm	6.3kgs	25mm	Fiberglass handles, C-head

ATP-600 SERIES

**ATP-600, 18 tons output, Weight: 6.5kgs,
Length: 650mm, Crimping range: 630mm²**



Model	Output	Application	Standard Dies	Crimping Range Supported	Length	Weight
ATP-600	18 tons	Cable lug hexagon crimping	Standard die set (total 12pcs) 35/50/70/95/120/150/185/240/300/400/500/630mm ² (i.e. B3035-B30400, B63500, B63630/R30 type)	Max. 630mm² crimping range	650mm	6.5kgs