

PIPE BENDERS

APB SERIES

CHARACTERISTIC

- Capable of bending angles from 0° to 90° on pipes ranging from 1/2" to 4".
- Cold bending, no pre-warming of pipe is required.
- Works quicker with the two-speed, heavy-duty hydraulic pumping system.
- Comfortable working position with the tripod stand.
- Longer piston stroke per pumping and optimized hand force minimizes operator fatigue.
- Supplied in a wooden case with a set of bending shoes and service pack.



APB-2J



APB-3J



APB-4J



APB-1, APB-2, APB-3 & APB-4



APB-1A


| Model | Hydraulic Ram Output (Ton) | Ram stroke (mm) | Bending range(O.D.) (mm) | Bending shoes (inch) | G.W. (Kg) | Packing size (cm) |
|--------|----------------------------|-----------------|--------------------------|--|-----------|-------------------|
| APB-2J | 13 | 250 | Ø21.3-Ø60 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" | 48.2 | 73×32×20 |
| APB-3J | 20 | 290 | Ø21.3-Ø88.5 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 2 1/2" 3" | 100.5 | 94×40×21 |
| APB-4J | 20 | 370 | Ø21.3-Ø108 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 2 1/2" 3" 4" | 156.8 | 118×46×25 |
| APB-1 | 6 | 150 | Ø13-Ø33 | 1/4" 5/16" 3/8" 1/2" 3/4" 1" | 19 | 50×25×15 |
| APB-2 | 13 | 250 | Ø21.3-Ø60 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" | 53 | 73×32×20 |
| APB-3 | 20 | 290 | Ø21.3-Ø88.5 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 2 1/2" 3" | 117 | 93×40×21 |
| APB-4 | 20 | 370 | Ø21.3-Ø108 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 2 1/2" 3" 4" | 155 | 118×46×25 |
| APB-1A | 6 | 150 | Ø16-Ø33 | 3/8" 1/2" 3/4" 1" | 17 | 43×38×13 |

ELECTRIC HYDRAULIC PIPE BENDERS

EHPB SERIES

CHARACTERISTIC

- Capable of bending angles from 0° to 90° on pipes ranging from 1/2" to 4".
- Cold bending, no pre-warming of pipe is required.
- Effective work with the electric pump.
- Carry handle and casters ensure quick and easy move from site to site.
- All components supplied in a wooden case, including electric pump, the bender, bending shoes and service pack.
- The Manual Hydraulic Pipe Benders are designed for precision cold bending of thick-walled pipes (gas, water and steam pipes, non-heated black iron pipes, galvanized pipes, schedule 40 & 80) up to 900 following GB/T 3091, DIN 2440, EN 10255, BS1387 standards.

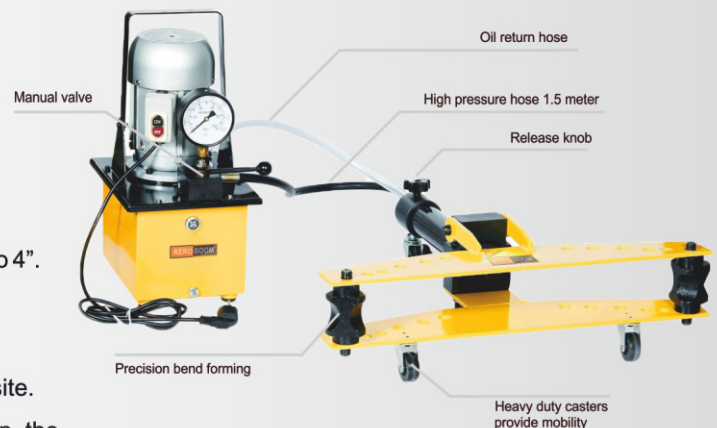

| Model | Hydraulic Ram Output (Ton) | Ram stroke (mm) | Bending range(O.D.) (mm) | Bending shoes (inch) | G.W. (Kg) | Packing size (cm) |
|---------|----------------------------|-----------------|--------------------------|--|-----------|-------------------|
| EHPB-2D | 13 | 250 | Ø21.3-Ø60 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" | 66.9 | 96×35×28 |
| EHPB-3D | 20 | 290 | Ø21.3-Ø88.5 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 2 1/2" 3" | 120.8 | 118×46×29 |
| EHPB-4D | 20 | 370 | Ø21.3-Ø108 | 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 2 1/2" 3" 4" | 163.8 | 118×46×33 |