



REMOTE HYDRAULIC CRIMPING HEAD

ATHX-240H SERIES

ATHX-240H (Remote Type)
10-300mm² (AWG8-400MCM) hexagon
crimping range / Flip-open jaw
6 tons output / 2kgs / 230mm

Model	Output	Application	Standard Dies	Crimping Range Supported	Length	Weight	Remark
ATHX-240H	6 tons	For non-insulated terminal hexagon crimping	Standard dies set (7pcs) 10-16/ 25-35/50-70/95-120/150/185/ 240mm ² (i.e. B8001-B8007, R19 type)	10-300mm² (AWG8-400MCM) hexagon crimping range	230mm	2kgs	Flip-open jaw, remote type



ATHX-325H SERIES

ATHX-325H
12 tons output
Weight: 3kgs
Length: 210mm

Model	Output	Head Rotation	Application	Standard Dies	Crimping Range Supported	Length	Weight
ATHX-325H	12 tons	360°	Cable lug hexagon crimping	Standard dies set (10pcs) 35/50/70/95/120/150/185/240/300/ 400mm ² (i.e. B3535-B35400/35 type)	Max. 400mm² crimping range	210mm	3kgs



ATP-900H SERIES

ATP-900H (Remote Type)
50mm C head jaw opening
15 tons output, Weight: 7.3kgs
Length: 370mm

Model	Output	Head Rotation	Application	Standard Dies	Crimping Range Supported	C-Jaw Open	Length	Weight
ATP-900H	15 tons	360°	Cable lug hexagon crimping	Standard dies set (12pcs) 35/50/70/95/120/150/185/240/300/ 400/500/630mm ² (i.e. B3035-B30400, B90500, B90630/R30 and R90 type) Die	Max. 630mm² crimping range	50mm	370mm	7.3kgs



ATP-240H SERIES

ATP-240H (Remote Type)
6-400mm² (AWG10-750MCM)
25mm C-jaw opening
12 tons output / 3.6kgs / 210mm


Model	Output	Application	Standard Dies	Crimping Range Supported	C-Jaw Open	Length	Weight	Remark
ATP-240H	12 tons	For connector or cable lug hexagon crimping	Standard dies (10pcs) 35/50/ 70/95/120/150/185/240/ 300/400mm ² (i.e. B3035-B30400, R30 type)	6-400mm² (AWG10-750MCM)	25mm	210mm	3.6kgs	Remote type, C-head

REMOTE HYDRAULIC CRIMPING HEAD



ATP-800H SERIES

ATP-800H (Remote Type)
50mm C head jaw opening
15 tons output, Weight: 7kgs
Length: 300mm

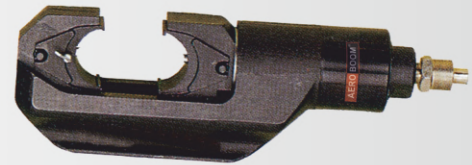

Model	Output	Head Rotation	Application	Standard Dies	Crimping Range Supported	C-Jaw Open	Length	Weight
ATP-800H	15 tons	360°	Cable lug hexagon crimping	Standard dies set (12pcs) 35/50/70/95/120/150/185/240/300/ 400/500/630mm ² (i.e. B3035-B30400, B80500, B80630/R30 and R80 type) Die	Max. 630mm² crimping range	50mm	300mm	7kgs

ATP-630H SERIES

ATP-630H
18 tons output
Weight: 4.8kgs
Length: 240mm



Model	Output	Head Rotation	Application	Standard Dies	Crimping Range Supported	Length	Weight
ATP-630H	18 tons	360°	Cable lug hexagon crimping	Standard die set (total 12pcs) 35/50/70/95/120/150/185/240/300/ 400/500/630mm ² (i.e. B3035-B30400, B63500, B63630/R30 type)	Max. 630mm crimping range	240mm	4.8kgs

ACO-400U SERIES

ACO-400U
16-400mm² indent crimping
20 tons output, Weight: 7.8kgs
Length: 230mm



Model	Output	Application	Standard Dies	Type	Crimping Range Supported	Length	Weight
ACO-400U	20 tons	Cable lug indent crimping	Male dies(5pcs) 16-25/35-50/70-120/ 150-240/300-400mm ² Female dies(5pc) 16-25/35-50/70-120/150-240/300-400mm ²	Remote	16-400mm² indent crimping	230mm	7.8kgs

ACO-400H SERIES

ACO-400H
35-400mm² hexagon crimping
20 tons output, Weight: 7.8kgs
Length: 230mm



Model	Output	Application	Standard Dies	Type	Crimping Range Supported	Length	Weight
ACO-400H	20 tons	Cable lug hexagon crimping	Standard dies set (Total 8pcs) 70/95/120/ 150/185/240/300/400mm ² (i.e. B4070-B40400/40Type)	Remote	35-400mm² hexagon crimping	230mm	7.8kgs



REMOTE HYDRAULIC CRIMPING HEAD

ACO-630 SERIES

ACO-630
70-630mm² hexagon crimping range
30 tons output, Weight: 16kgs
Length: 360mm

Model	Output	Application	Standard Dies	Type	Crimping Range Supported	Length	Weight
ACO-630	30 tons	Distribution & transmission line hexagon crimping	Standard dies set (4pieces) 300/400/500/630mm ² (i.e. B60300-B60630/60Type)	Remote	70-630mm ² hexagon crimping range	360mm	16kgs



AOP-1000 SERIES

AOP-1000
400-1000mm² hexagon crimping range, 60 tons output
Weight: 30.7kgs, Length: 450mm

Model	Output	Application	Standard Dies	Type	Crimping Range Supported	Length	Weight
AOP-1000	60 tons	Distribution & transmission line and sleeves lugs hexagon crimping	Standard dies set (4pieces) 500/630/800/1000mm ² (i.e. B101500-B1011000/ 101 Type)	Remote	400-1000mm ² hexagon crimping range	450mm	30.7kgs



AOP-100W SERIES

AOP-100W
Weight: 32kgs
Dia. 200x350(H)mm

Model	Output	Application	Type	Stroke	Acting	Oil Volume	For Lugs	Weight	Dimension
AOP-100W	100 tons	Distribution & transmission line and sleeves lugs hexagon crimping	Remote	22mm	Double acting	314c.c.	Max. O.D. 75mm	32kgs	Dia. 200x350(H)mm



AOP-200W SERIES

AOP-200W
84kgs
Dia. 270x415(H)mm

Model	Output	Application	Type	Stroke	Acting	Oil Volume	For Lugs	Weight	Dimension
AOP-200W	200 tons	Distribution & transmission line and sleeves lugs hexagon crimping	Remote	40mm	Double acting	1134c.c.	Max. O.D. 90mm	84kgs	Dia. 270x415(H)mm