

AIR PUMP

PA SERIES

Single and Double Acting
Two Speed
700 bar (10,000 psi)

FEATURES

- Heavy duty construction for extended lift and ease of maintenance.
- Air exhaust muffler for quiet operation.
- Pumps feature both air and oil filters to reduce risk of damage from contaminants.
- Internal load limiting device prevents overload.



PA-001



PA-002



PA-200




PA-008



PA-009



10000 PSI Air Hydraulic Pump Flow Rate

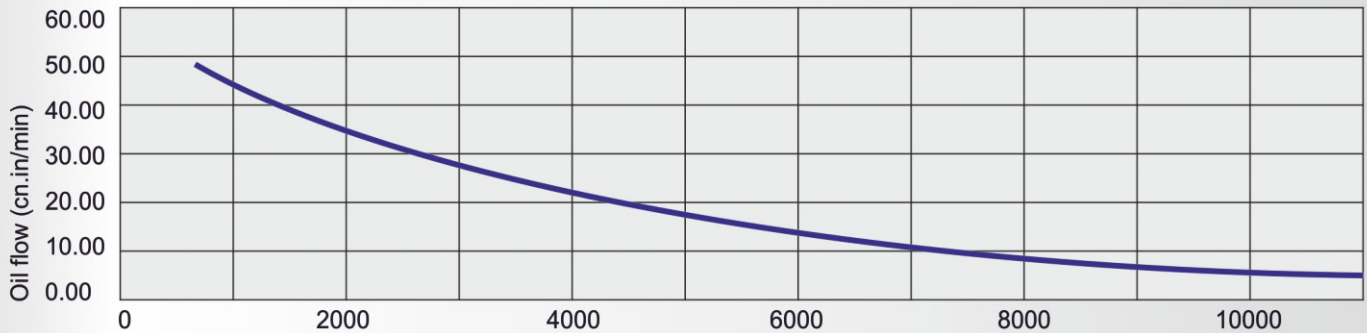

Model	Cylinder Type	Pressure Rating (PSI)	Air Pressure (PSI)	Air Volume (CFM)	Usable Oil Volume (cm³)	Flow (cm³/min)		Valve Function	Dimensions (in.)			Reservoir Material	Control Type	Weight (kg)
						No Load (cm³)	Load (cm³)		L (mm)	W (mm)	H (mm)			
PA-001	S/A	10000	90-145	11	2294.2	811.1	124.5	2W/2P	312.4	170	190.5	PLASTIC	FOOT PEDAL	11.8
PA-002	S/A	10000	90-145	11	1605.9	811.1	124.5	2W/2P	264	137	185	ALUMINUM	FOOT PEDAL	8.6
PA-003	S/A	10000	90-145	11	4506.4	811.1	124.5	2W/2P	317	178	190	STEEL	FOOT PEDAL	12.7
PA-004	S/A	10000	90-145	11	7243	811.1	124.5	2W/2P	279	223	254	STEEL	FOOT PEDAL	16.3
PA-008	S/A	10000	90-145	11	1605.9	811.1	124.5	2W/2P	262	134	185	ALUMINUM	REMOTE CTRL	11.3
PA-009	S/A	10000	90-145	11	7243	811.1	124.5	2W/2P	168.8	86.8	119.6	ALUMINUM	REMOTE CTRL	11.3
PA-010	S/A	10000	90-145	11	1605.9	811.1	124.5	2W/2P	279	226	274	PLASTIC	FOOT PEDAL	8.6
PA-200	S/A	10000	90-145	11	599.8	704.6	124.5	2W/2P	450	155	145	ALUMINUM	FOOT PEDAL	5.9
PA-001S	D/A	10000	90-145	11	2294.2	811.1	124.5	4W/3P	312	170	236	PLASTIC	FOOT PEDAL	14

NOTE: PA-001S IS DOUBLE ACTING AIR HYDRAULIC PUMP.